


Verlegeanleitung

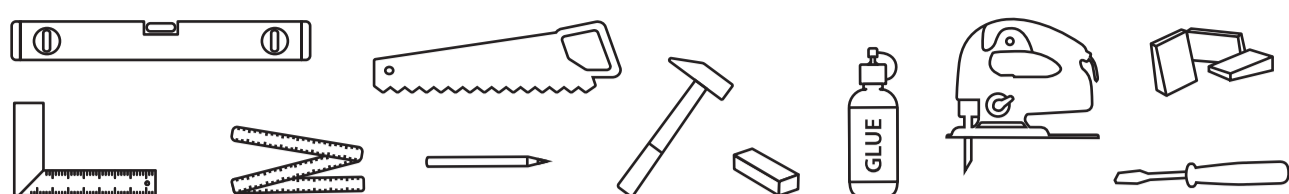

Rev. 6.1 / 11.20

1 rel. hum. 40-60%
temp. >18°C/64°F
48 h
≥ 30 cm
12 in

2 CA 0,3 CM % CT 1,8 CM %
max. 2 mm / 1 m
5/64 in / 3 ft

3 max. 3 mm, 1/8 in
0.2 mm PE

4 2 cm
25/32 in
20 cm
7 7/8 in
PE

5 x=10 mm
3/8 in

6 max. 29°C
84°F

7 rel. hum. 40-60%
temp. >18°C/64°F

8 x=10 mm
3/8 in

9 > 8 cm
3 1/8 in

10 > 8 cm
3 1/8 in
x=10 mm
3/8 in

11 11 m
36 ft

12 11 m
36 ft

13 11 m
36 ft

14 11 m
36 ft

15 11 m
36 ft

16 11 m
36 ft

17 11 m
36 ft

18 11 m
36 ft

19 11 m
36 ft

20 11 m
36 ft

21 11 m
36 ft

22 11 m
36 ft

23 11 m
36 ft

24 11 m
36 ft

25 V1 11 m
36 ft

26 V1 11 m
36 ft

27 V1 11 m
36 ft

25 V2 11 m
36 ft

26 V2 11 m
36 ft

27 V2 11 m
36 ft

28 11 m
36 ft

29 11 m
36 ft

30 11 m
36 ft

31 11 m
36 ft

32 11 m
36 ft

33 11 m
36 ft